

**SUITABLE FOR ATMOSPHERES CONTAINING:**

acetaldehyde, ethane, ethyl chloride, ammonia,  
benzines, gasoline, n-butyl alcohol, diesel fuel,  
jet engine fuels, acetic acid anhydride,  
n-hexane, methane, methanol,  
naphthalene, phenol,  
propane, toluene



# ROWExd

## OIL DETECTOR FOR HAZARDOUS AREAS

ROW Exd oil spill detector is designed to detect oil contamination in the hazardous areas where ignitable concentrations of flammable gases, vapors or mists often exist.

› **FLAMEPROOF (Exd) ENCLOSURE**

ROW Exd Oil Detector is encased in flameproof (Exd) 3rd party certified enclosure, made of 316L stainless steel, which is acid and corrosion resistant making it ideal for the toughest environments.

› **TOP IP RATED Exd DEVICE** 

IP68 certified non-contact Exd oil detector, using UV fluorescence method — highest rated on the market.

› **RANGE BEST IN CLASS** 

Outstanding detection range of 8m — twice the distance in comparison to similar products on the market.

› **INDUSTRY LEADING SENSITIVITY — 1 µm** 

Advanced software algorithms are calibrated to detect oil down to single-micron layers and minimize false alarms.

› **COMPATIBLE WITH EXISTING DEVICES** 

ROW Exd Oil Detector can be installed within a network of LDI's ROW Stainless Steel and ROW Aluminium devices, making expansion of existing ROW networks exceptionally convenient.



Italy, Oil Terminal




UAE, Power Plant Offshore



Belgium, Oil Refinery

Optical non-contact and autonomous sensor for real-time detection of oil contamination in hazardous areas.

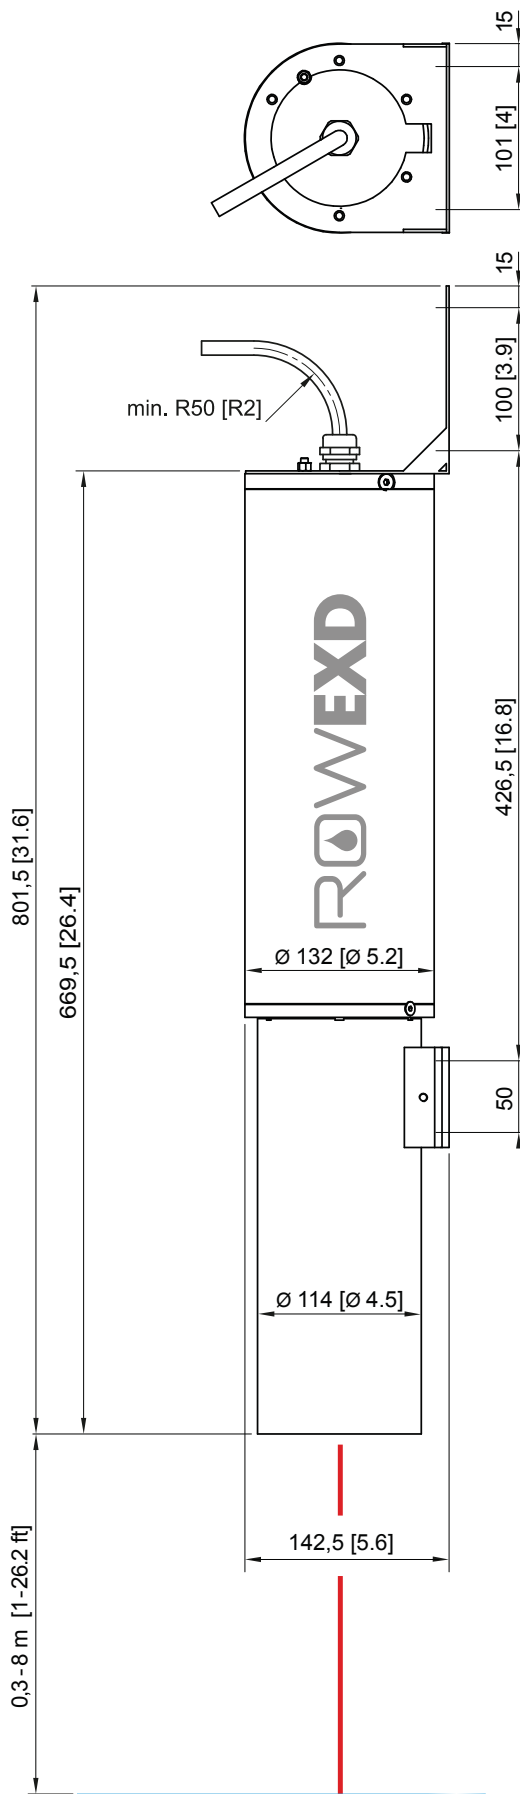

Dimensions unless otherwise stated: mm [inches]

## TECHNICAL SPECIFICATIONS

<b>MODEL</b>	O-2301 Ex d Zone 1	
<b>SENSITIVITY</b>	> 1 µm (micrometer) oil film	
<b>RANGE</b>	up to 8 m above surface (water or ground)	
<b>OPERATION TEMPERATURE</b>	-30°C to +60°C [-22°F to 140°F]	
<b>ENCLOSURE</b>	ATEX & IECEx flameproof enclosure - Zone 1 II 2 G Ex d IIB Class 1, Division 1 Groups CD IP68, stainless steel 316L	
<b>DIMENSIONS</b>	669,5 x 142,5 x 132 mm [26.4 x 5.6 x 5.2 in]	
<b>WEIGHT</b>	12 kg [26.5 lbs]	
<b>POWER OPTIONS</b>	12 VDC (10V - 30V) as standard other options: 110/220 VAC 60/50 Hz AC/DC adapter, solar/battery options available	
<b>POWER USAGE</b>	< 2 Watt (DC)	
<b>LIGHT SOURCE</b>	pulsed UV LED	
<b>LED LIFETIME</b>	5 years typical, thereafter, LED replacement	
<b>OUTPUT</b>	relay contacts, RS-485, 4-20 mA (as standard)	
<b>COMMUNICATION OPTIONS</b>	RS-232 ethernet/LAN audio alarm wireless radio link Wi-Fi GSM custom solution	optional adapters available – contact Sales Engineer for additional information
<b>USER INTERFACE</b>	ROW Configurator for setup & adjustment ROW Manager for network visualization	
<b>SYSTEM CERTIFICATIONS</b>	CE: EN 61000-6-2, 61000-6-3 EN 61326-1, 61000-4-2, 61000-4-5, 61000-4-6, 61000-4-8, EN 61010-1 US EPA: (EPA/530/UST-90/009)	
<b>ENCLOSURE CERTIFICATIONS</b>	DNV-2003-OSL-ATEX-0436U: EN/IEC: 60079-0, 60079-1 IP68: EN 60529	
<b>WARRANTY</b>	2 year factory warranty as standard, supported worldwide	